



FIFA LABORATORY TEST REPORT

Manual 2015

Product name	Stemgrass 60-14 PU
Product type (Field/Lines)	Field
FIFA Licensee	CoCreation Grass Corporation, Ltd.
FIFA accredited Test Institute	Sports Labs Ltd.

Laboratory Test report number	17254/2854
Date of test	25.10.2016

Football Turf Laboratory Test Report

1 – Introduction / Process Overview	3
2 – Test Object, Participants	4
2.1 Test numbers	
2.2 Test Object, Product name, Identification codes	
2.3 Parties involved, Addresses (turf manufacturer, test institute, certifying body)	
3 – Test Conclusion, Product Approval	4
4 – Product Information / Specifications	5
4.1 Overview – a typical product composition	
4.2 Artificial turf	
4.3 Performance infill	
4.4 Stabilising infill	
4.5 Shockpad / elastic layer (where applicable)	
4.6 Maintenance requirements	
5 – Detailed Laboratory Test Results	10
5.1 Overview – ball and player to surface interactions	
5.2 Product identification	
5.3 Ball / surface interaction	
5.4 Player / surface interaction	
5.5 Environmental resistance (artificial, light, water)	
5.6 Miscellaneous	
5.7 Explanatory graphs / pictures	
5.7.1 DSC (Differential Scanning Colorimetry) scans of pile yarn	
5.7.2 a) Performance infill particle grading curve	
5.7.2.b) Stabilising infill particle grading curve	
5.7.3 TGA of performance infill	
5.7.4 Unbound sub-base Composition	
5.7.5 Simulated wear, photos before / after	

Football Turf Laboratory Test Report

1 – Introduction / The Process of certification

In order to be certified, football turf fields must reach the performance and quality criteria established to be as close as possible to playing characteristics of natural grass. To this end, each field must undergo four steps as outlined below:

- a thorough composition and resilience test of the product in the laboratory (step 1)
- the installation of the product as declared, applying the outlined procedures (step 2)
- a test of the final installation for the relevant characteristics of the field as a whole system (step 3)
- if successful, certification FIFA QUALITY or FIFA QUALITY PRO field (step 4)

After expiration of the certificate, the field can be retested (step 3/4)



Fig. 1.2 Approval process steps and the related documents / parties

Legend:



Tests performed by
FIFA accredited
Test Institutes only



Originated by
the manufacturer
(FIFA licensee)

This process is part of the FIFA Quality Programme for Football Turf in order to

- replicate the playing qualities of good quality natural grass,
- create a playing environment that does not increase the risk of injury to players
- achieve adequate durability (providing it is properly maintained)

For more details on *FIFA Quality Programme for Football Turf* see www.fifa.com/quality.

This document covers the complete step 1, FIFA LABORATORY TESTS REPORT. Consider:

- Tests are performed on a representative sample of the manufacturer's sample delivered to the FIFA accredited test institutes
- The test report is only valid if reproduced in its entirety
- The results are only valid for the complete Football Turf (related product) as stated in 2.1
- The related product is eligible for undergoing a field test on a final installation.

IMPORTANT:

To reach FIFA QUALITY PRO (or QUALITY) field certification, as next steps

- the installation has to comply with the related Product Declaration / Method Statement (step 2)
- a successfully passed subsequent FIELD TEST (step 3/4)

This FIFA LABORATORY TEST REPORT may only be used in relationship to Football Turf fields that are going to be submitted for certification under the *FIFA Quality Programme of Football Turf*. Any other use of this report is a violation of the report's copyright which is held by FIFA and breaches the terms of the FIFA Quality Programme of Football Turf licensing agreement.

Football Turf Laboratory Test Report

2 – Test Object, Participants

2.1 Test Numbers

Report Identification	Laboratory Test report number	17254/2854
	Test Institute Project number	17254

2.2 Test Objects

	Product Name	Stemgrass 60-14 PU		
	Product Identification code	-		
	Name of the synthetic turf system	Stemgrass 60-14 PU		
	Performance infill	SBR		
	Stabilising infill	Sand		
	Shock-pad or elastic layer (if applicable)	-		
	Sub-base composition	Rigid engineered Base		

2.3 Participants, Addresses

Applicant • FIFA preferred producer • Licensee 	Name	CoCreation Grass Corporation, Ltd.			
	Address	CoCreation Grass Corporation, Ltd., NANJING			
	Contact	Phone	0086 25 69811726	email	Diana_jiang@ccgrass.com
FIFA accredited Test Institute	Name	Sports Labs Ltd.			
	Address	Sports Labs Ltd., LIVINGSTON			
	Contact	Phone	+44(0)1506 444 755	email	sean@sportslabs.co.uk

3 – Test Conclusion, Product Approval

The presented Football Turf surface satisfies the FIFA LABORATORY TEST requirements of

FIFA QUALITY	Passed	«passed» or «failed»
FIFA QUALITY PRO	Passed	«passed» or «failed»

IMPORTANT: A successfully passed test of the final installation (FIFA FIELD TEST) is mandatory to obtain FIFA QUALITY / QUALITY PRO Certification!

Report originated by	Name	Craig Melrose			
	Position	Laboratory Coordinator			
	Date	25.10.2016			
Report approved by	Name	Sean Ramsay			
	Position	Laboratory Director			
	Date	25.10.2016			

Football Turf Laboratory Test Report

4 – Product Information / Specifications

4.1 Overview – a typical product composition

The basic structure and composition of artificial turf varies. To reach the goal of defined quality and specific functional performances, a set of the relevant parameters for the products / materials used was defined. Materials / products typically used are as follows:

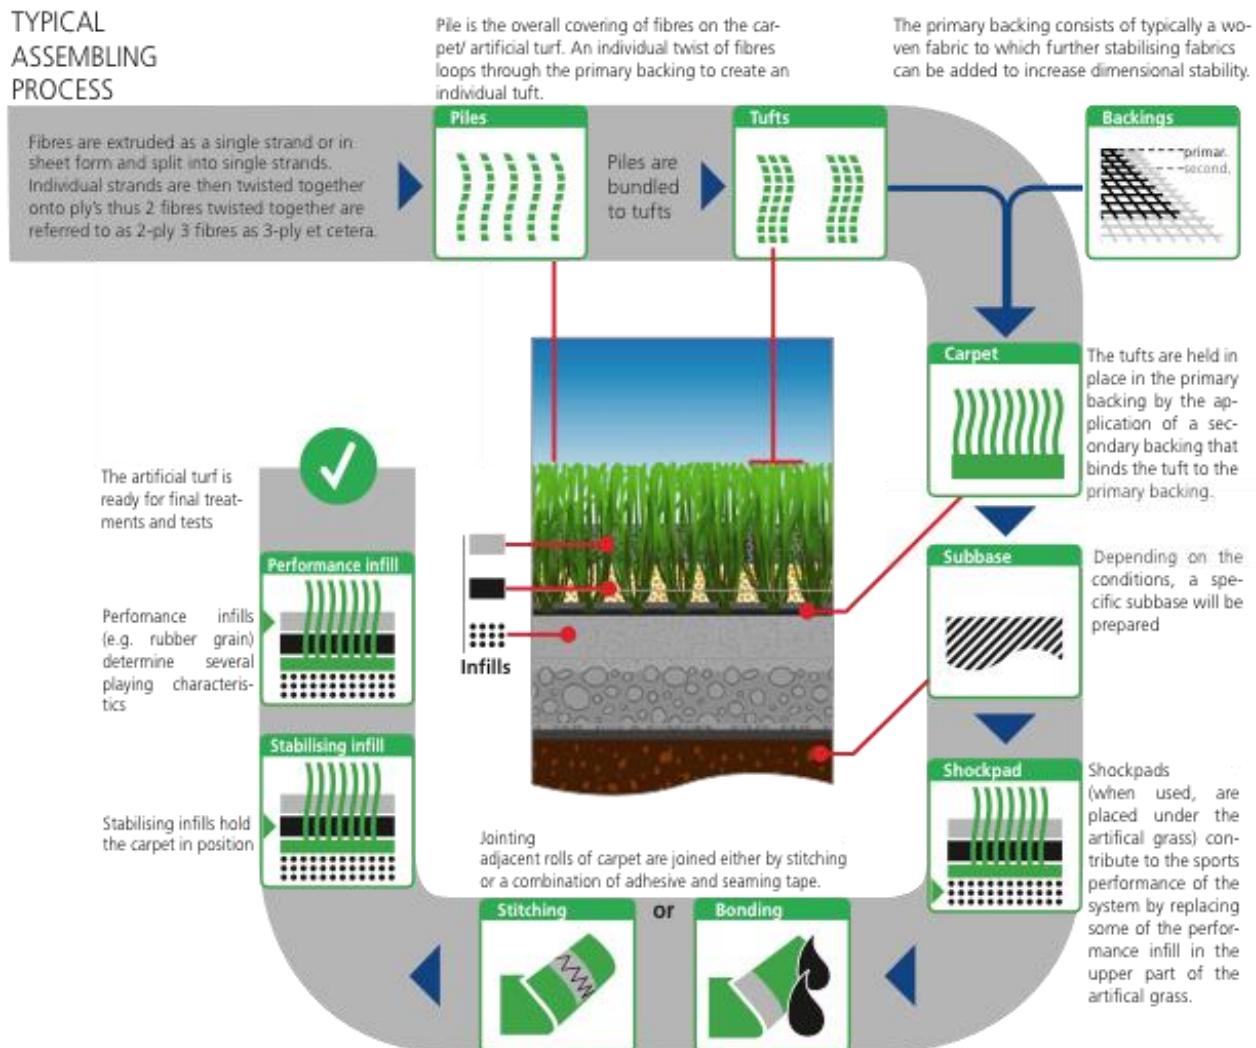


Fig. 1.3 Products / materials used to build up artificial turf

Football Turf Laboratory Test Report

4 – Product Information / Specifications





4.2 Artificial turf (1/2)

Manufacturer	CCGrass			
Tuft pattern	Straight			
Pile yarns	Yarn A	Yarn B	Yarn C	Standard Test Method
Yarn Manufacturer	CCGrass	-	-	
Product name, code	Stemgrass	-	-	
Pile yarn profile	See details below	See details below	See details below	-
Pile thickness [μm]	340 micron	-	-	-
Pile colour [RAL]	1	Emerald	-	-
	2	Olive	-	-
	3	-	-	-
Pile width [mm]	1.6 mm	-	-	-
No of tufts/m ²	8820 /m ²	-	-	ISO1773
Pile length [mm]	60 mm	-	-	ISO 2549
Pile weight [g/m ²]	1360 g/m ²	-	-	ISO 8543
Pile yarn characterization	PE	-	-	-
Pile yarn dtex	12000	-	-	-

Football Turf Laboratory Test Report

4 – Product Information / Specifications

4.2 Artificial turf (2/2)

	Primary backing	Product name / code	-
		Manufacturer	Yangzhouhengxin
	Re- enforcement scrim	Product name / code	-
		Manufacturer	Yangzhouhengxin
	Secondary backing	Product name / code	PU
		Manufacturer	CCGrass
		Dry application rate [g/m ²]	680 g/m ²
	Carpet	Minimum tuft withdrawal force [N]	30 N
		Carpet mass per unit area [g/m ²]	2250 g/m ²
Method of jointing			
	Bonded joints	Adhesive brand name	Beijinghanfeng
		Adhesive manufacturer	Beijinghanfeng
		Application rate [g/lm]	-
		Jointing film brand name	Yihua Bonar
		Jointing film manufacturer	-
	Stitched seams	Tread brand name/product code	-
		Tread manufacturer	-
		Stitch rate [stitch per lm]	-

4.3 Performance infill


	Specifications	Standard Test Method
Product name / code	SBR	
Manufacturer	Genan	
Material type	SBR	
Material grading	0.5 - 2.5 mm	
Particle shape	Irregular	prEN 14955
Particle size range	0.5 - 2.5 mm	EN 933-Part 1
Bulk density [g/cm³]	0.45 g/cm ³	EN 1097-3
Application rate [kg/m²]	16 kg/m ²	

Football Turf Laboratory Test Report

4 – Product Information / Specifications

4.4 Stabilising infill

	Specifications	Standard Test Method
Product name / code	Silica Sand	
Manufacturer	Various	
Material type	Silica sand	
Material grading	0.5 - 1.0 mm	
Particle shape	Round	prEN 14955
Particle size [range]	0.5 - 1.0 mm	EN 933-Part 1
Bulk density [g/cm³]	1.460 g/cm ³	EN 1097-3
Application rate [kg/m²]	15 kg/m ²	



4.5 Shockpad / elastic layer*

	Specifications	Standard Test Method
Product name / code	-	
Manufacturer	-	
Type	-	
Composition**	-	
Bulk density [g/cm³]	-	
Thickness	-	EN 1979
Shock absorption [%]	-	FIFA 4a
Deformation	-	FIFA 5a
Tensile strength [N]	-	
Mass per unit area [kg/m²]	-	

* if part of system supplied

** type, rubber granule grading, binder content, etc



Football Turf Laboratory Test Report

4 – Product Information / Specification

4.6 Maintenance requirements (recommendations)

Equipment / material	Remarks
Tractor Unit	Purpose - the power unit that pulls the maintenance tools over the field
Drag	Brush
	Mat
Ball roll ramp	A testing device used to assess the speed of a football over the surface



Maintenance logbook	Is used to record all the maintenance activities that take place on the Football Turf Surface
Top up infill materials	to top up penalty spot and corner areas
...	For further maintenance requirements, please consult the manufacturer's recommendations for your specific system



FIFA Licensee's comments / hints

Football Turf Laboratory Test Report

5 – Detailed Laboratory Test Results

5.1 Overview – ball and player to surface interactions



How is the field to play? By means of the following 8 parameters, this question can be answered very well. Furthermore, some values allow conclusions regarding maintenance in order to keep the field in top shape.

Parameter	Comments / hints	Parameter	Comments / hints
1- Vertical ball rebound	 <p>The higher the value the higher the ball will rebound. The ball should not bounce too high or too low.</p> <p>Ball / surface interaction</p>	5- Shock absorption	 <p>Shock absorbcity is an indicatior of how hard the field feels to the player. A value that is too low indicates a hard field and can cause damage to player's joints too soon and the surface is energy sapping resulting in increases in fatigue and over-use injuries.</p> <p>Player / surface interaction</p>
2- Angled ball rebound	 <p>Angled ball rebound is a combination of the hardness of the field and the resistance from the fibres to the ball and thus a high reading can come from a hard surface, or a low grip surface or a combination of both</p> <p>Ball / surface interaction</p>	6- Deformation	 <p>A surface that deforms too much will result in overstressing of ligaments particularly the around the ankle.</p> <p>Player / surface interaction</p>
3- Ball roll	 <p>The higher the value the faster the ball will run over the surface. The ball should not be too fast or too slow.</p> <p>Ball / surface interaction</p>		
4- Rotational resistance	 <p>This simulates the player's ability to alter direction, too high a value and stress can occur across knee ligaments, too low and the player will not be able to grip the surface and may slip causing ligament damage.</p> <p>Player / surface interaction</p>		

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.2 Product identification

	Property	Test result
 Artificial Turf	Carpet mass per unit area [g/m ²]	2298 g/m ²
	Tufts per unit area [m ²]	9009 /m ²
	Pile length above backing [mm]	60 mm
	Pile weight [g/m ²]	1300 g/m ²
	Water permeability of carpet [mm/h]	3573 mm/hr
	Free pile height	18 mm
	Yarn cross section and thickness	See Annex
 Performance infill	Particle size range	0.8 – 2.0 mm
	Particle shape	A2
	Bulk density [g/cm ³]	0.430 g/cm ³
	Infill depth	32 mm
	Thermographic analysis	% organic
		% inorganic
		63 %
 Stabilising infill	Particle size range	0.5 - 1.0 mm
	Particle shape	B2
	Bulk density [g/cm ³]	1.544 g/cm ³
 Shockpad / elastic layer (if part of system supplied)	Shock absorption [%]	-
	Deformation	-
	Thickness	-

5.3 Ball / surface interaction

Property	Condition		Test Results	FIFA Approval requirements		P = passed F = failed		
	Initial, un-aged	Dry		0.6 – 1m	0.6-0.85 m	QUAL- ITY	PRO	
 Vertical ball rebound		Wet	0.82			Passed	Passed	
		After simulated wear	0.85			Passed	Passed	
		3'020 cycles	0.96	0.6 – 1m		Passed	Passed	
		6'020 cycles						
 Angled ball rebound	Dry	52	45 – 80%	45 – 80%	Passed	Passed		
	Wet	64			Passed	Passed		

Football Turf Laboratory Test Report

 Reduced Ball roll	Initial, un-aged	Dry	7.2	4 – 10m	4 – 8m	Passed	Passed
	After simulated wear 3'020 cycles	Dry	7.6			Passed	Passed
		Wet	7.9	4 – 12m		Passed	
	After simulated wear 6'020 cycles	Dry	8.5			Passed	
		Wet	9.0			Passed	

Football Turf Laboratory Test Report

5 – Detailed Test Results


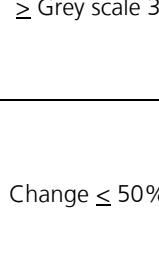





5.4 Player / surface interaction

Property	Condition	Test Results	FIFA Approval requirements		P = passed F = failed	
			QUALITY	QUALITY PRO	QUALITY	PRO
Shock absorption 	Initial, Un-aged	Dry	65	57 – 68%	62 – 68%	Passed
		Wet	65			Passed
	After simulated wear	3'020 cycles	62	57 – 68%	62 – 68%	Passed
		6'020 cycles	58			Passed
	50°C		67	57 – 68%	62 – 68%	Passed
	– 5°C ⁽¹⁾		66			Passed
Deformation 	Initial	Dry	10.0	6 – 11mm	6 – 10mm	Passed
		Wet	10.0			Passed
	After simulated wear	3'020 cycles	8.5	6 – 11mm		Passed
		6'020 cycles	7.8			Passed
Rotational resistance 	Initial	Dry	38	27–48Nm	32–43Nm	Passed
		Wet	35			Passed
	After simulated wear	3'020 cycles	41	27–48Nm		Passed
		6'020 cycles	43			Passed
Skin / surface friction 	Dry		0.70	0.35 – 0.75 μ	0.35 – 0.75 μ	Passed
Skin abrasion	Dry		14	$\pm 30\%$	$\pm 30\%$	Passed


Football Turf Laboratory Test Report

5 – Detailed Test Results

5.5 Environmental impact (artificial, light, water)

Property	Aspect	Condition	Test result	FIFA Requirements			
				P/F	P= passed F= failed		
 Pile yarns	 Colour change	1	 After artificial weathering	4 - 5	 ≥ Grey scale 3	Passed	
				4 - 5		Passed	
				-			
	 Yarn tensile strength	1		- 20 %	 Change ≤ 50%	Passed	
				- 34 %		Passed	
				-			
 Polymeric infill	Colour change			4 - 5	 ≥ Grey scale 3	Passed	
	Visual change in composition			No Change		Passed	
 Complete system	Water permeability	N/A	1691 mm/hr	>180 mm/h		Passed	
 Stitched joints	Strength	Un-aged	-	 ≥ 1000N/100mm			
		Water aged	-				
 Bonded joints	Strength	Un-aged	1844 N/100mm	 ≥ 75N/100mm	Passed		
		Water aged	1712 N/100mm		Passed		
 Carpet tuft	Withdrawal force	Un-aged	49 N	 ≥ 30N	Passed		
		Water aged	38 N		Passed		
Heat	category		Category 2/3	Information			
Splash	Splash characteristic		> 1.5 %	Information			

5.6 Miscellaneous

 Shockpad Elastic layer	Tensile strength	Un-aged	-	≥ 0.15 MPa	
--	------------------	---------	---	------------	--

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

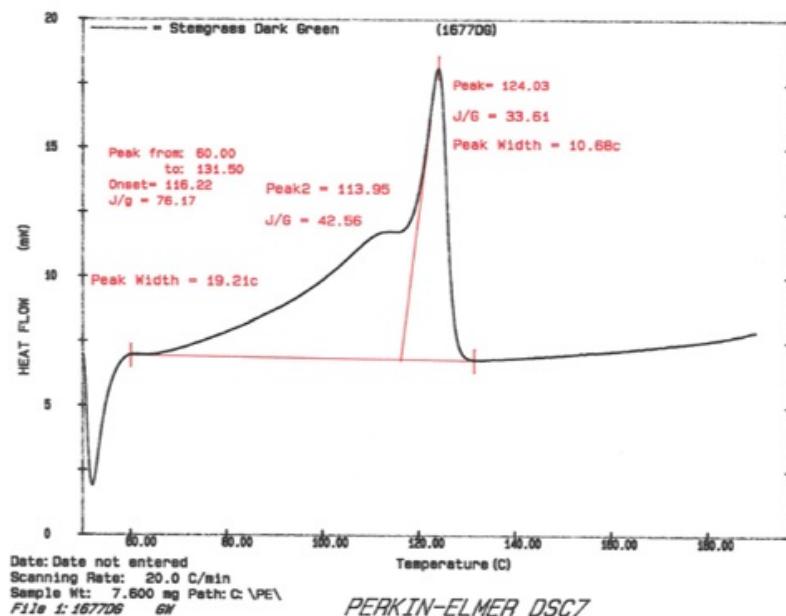
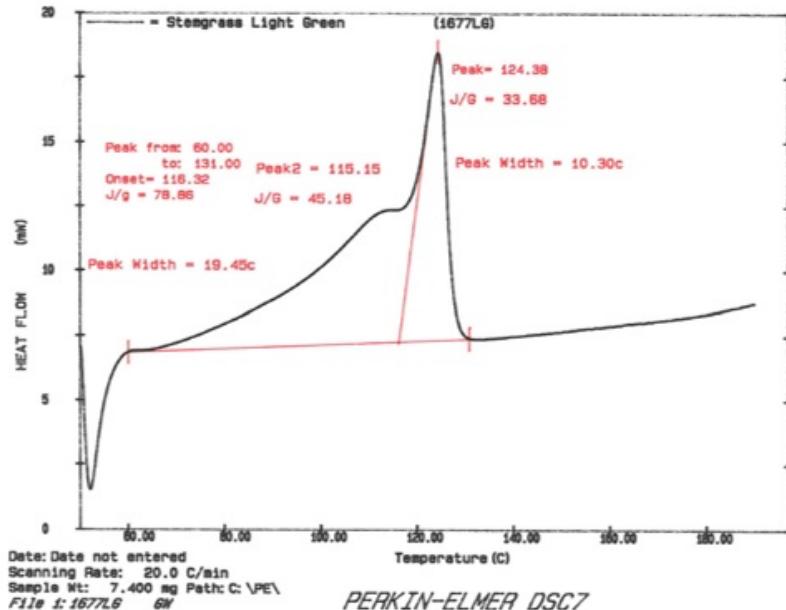
- 5.7.1 DSC (Differential Scanning Colorimetry) scans of pile yarn
- 5.7.2 Performance infill particle grading curve / Stabilising infill particle grading curve
- 5.7.3 TGA (Thermo Gravimetric Analysis) of performance infill
- 5.7.4 Composition of unbound sub-base (if tested as part of system) Sub-base particle grading curve
- 5.7.5 Simulated wear, photos before / after

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.1 DSC Differential Scanning Colorimetry scans of pile yarn



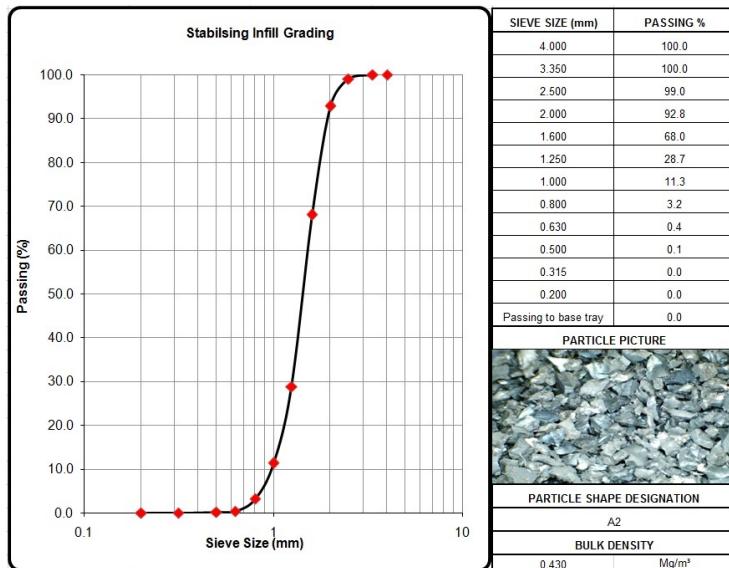
Comments:

Football Turf Laboratory Test Report

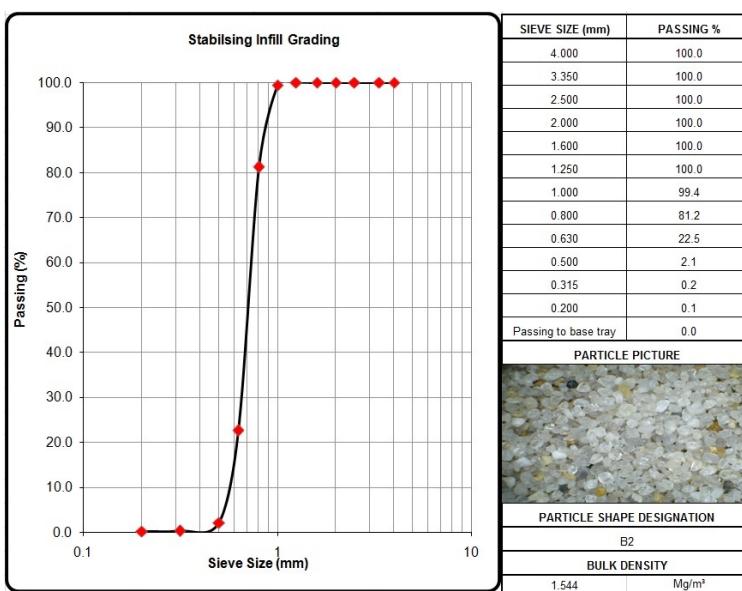
5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.2 a) Performance infill particle grading curve



5.7.2 b) Stabilising infill particle grading curve



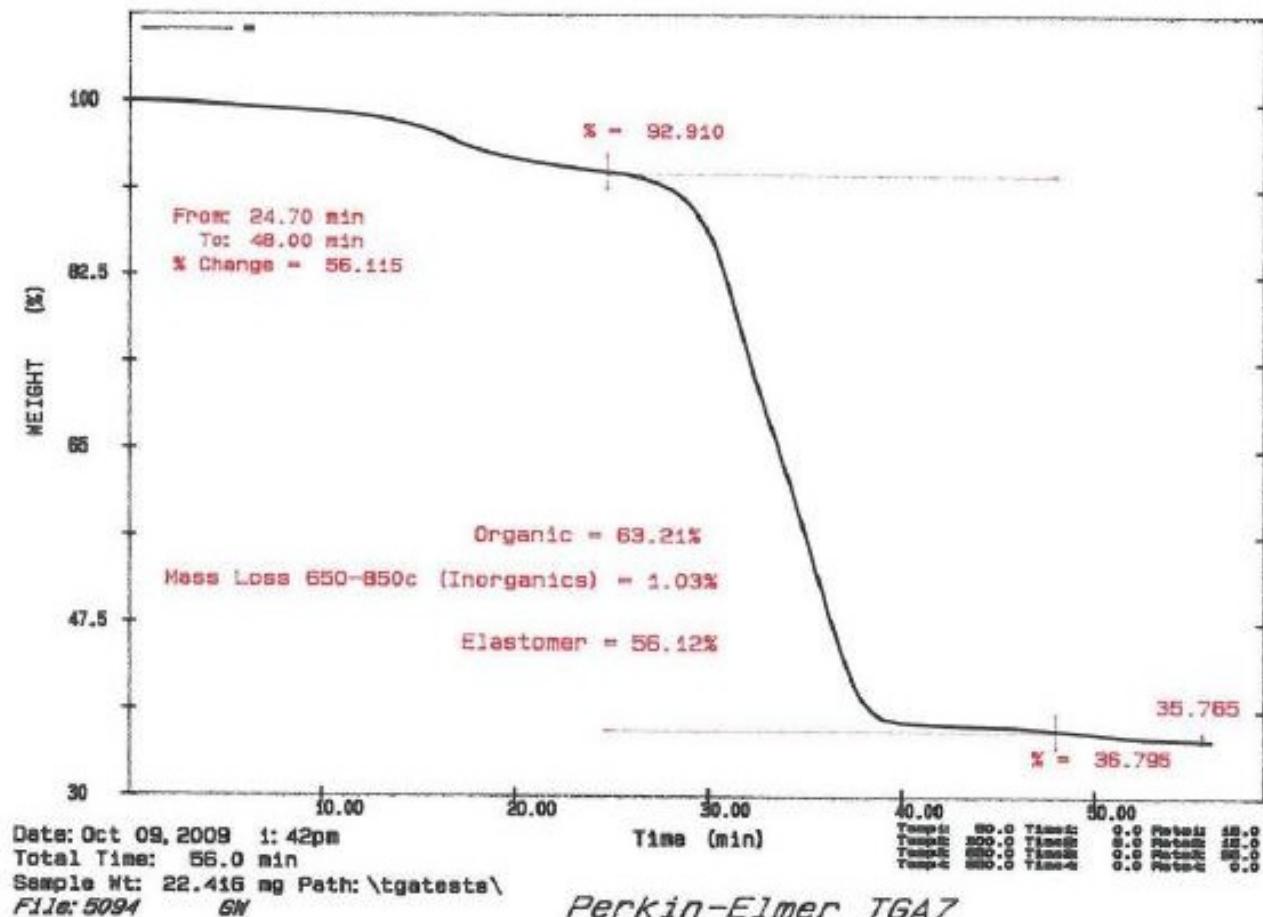
Comments:

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.3 TGA of performance infill



Comments:

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.4 Sub base (if tested as part of system)

	Composition	-
	Particle size range	-
	Particle shape	-
	Thickness	-
	Compaction & test method	-

Sub-base particle grading curve

Comments:

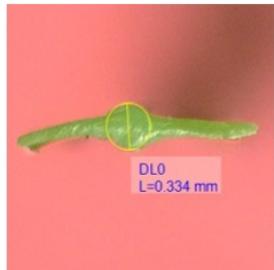
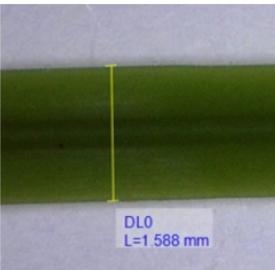
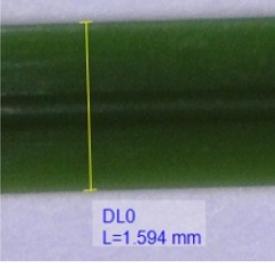
Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.5 Simulated wear (photos before / after wear)

Page: 1

Before wear	After wear
Pre-Wear  	3000 Lisport XL Cycles   
Yarn    	6000 Lisport XL Cycles   

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.5 Simulated wear (photos before / after wear)

Page: 2

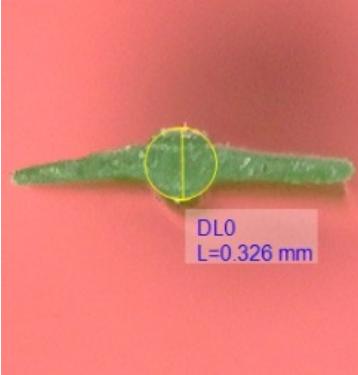
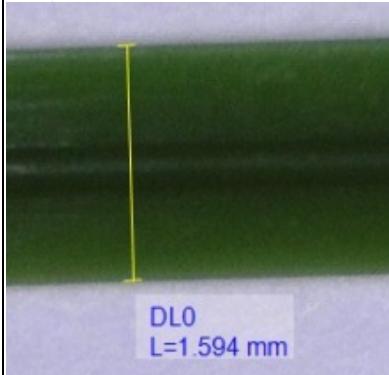
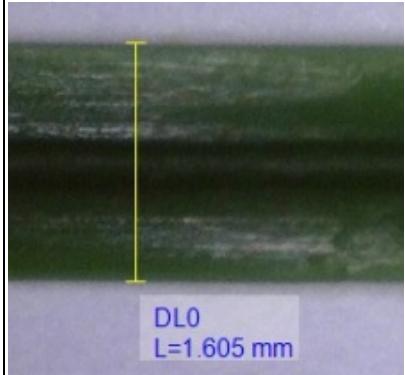
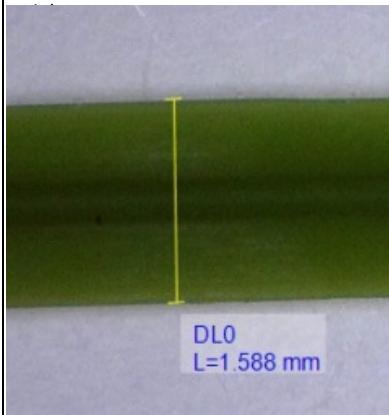
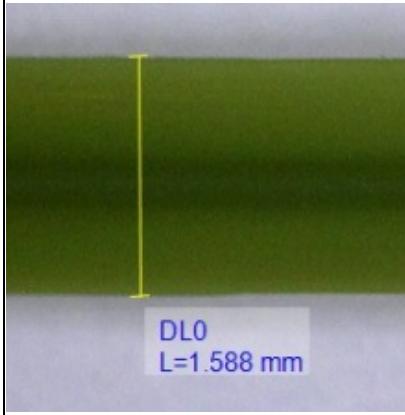
Before wear	After wear

Football Turf Laboratory Test Report

5 – Detailed Test Results

5.7 Explanatory graphs / pictures

5.7.5 Yarn characteristics

		
		
Cross-section Yarn 3	Side A Yarn 3	Side B Yarn 3

Details of dimension measurements

Emerald yarn - 326 micron, 1.6 mm, circle diameter 326 micron, Olive yarn - 334 micron, 1.6 mm, circle diameter 334 micron
--